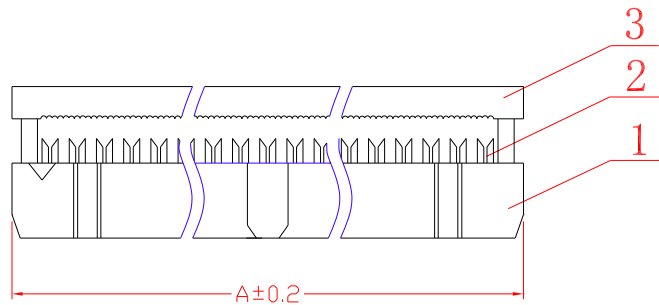
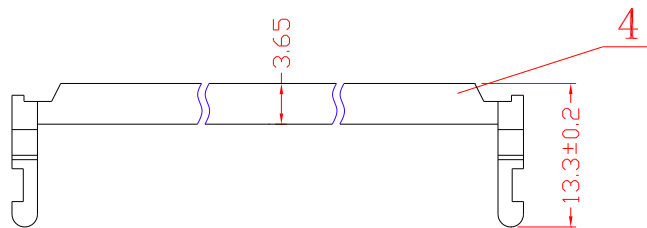
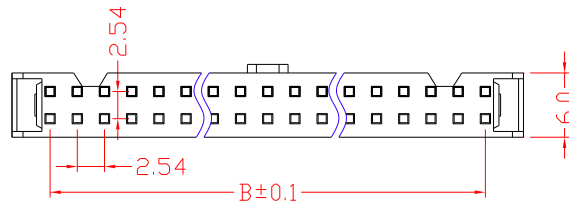


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature:-55°C--+105°C
 Contact: Phosphor bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B
8	14.73	7.62
10	17.27	10.16
14	22.35	15.24
16	24.89	17.78
20	29.97	22.86
26	37.59	30.48
30	42.67	35.56
34	47.75	40.64
40	55.37	48.26
50	68.07	60.96
60	80.77	73.66
64	85.85	78.74

IDC 08. IDC10. IDC14. IDC 16. IDC20. IDC26. IDC30. IDC34. IDC40.IDC50.IDC60