





版本：V2.2

本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.


RoHS compliant

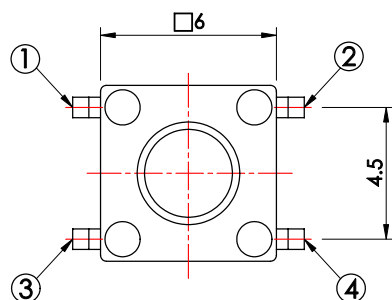

CIRCUIT DIAGRAM

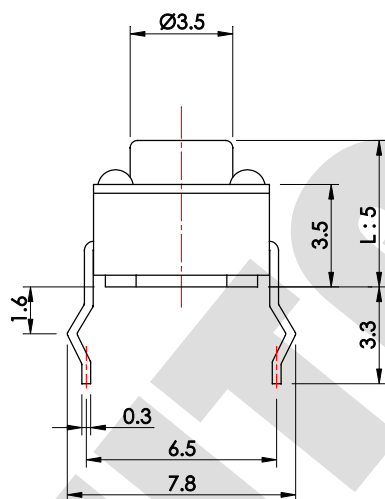

P.C.B. LAYOUT

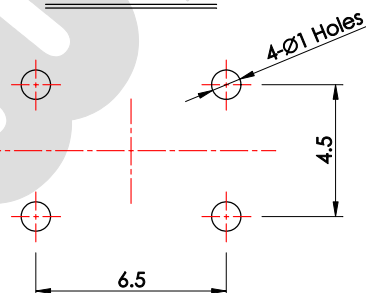

SPECIFICATION

Rating: 50mA 12V DC.

Function: OFF-(ON).

Travel: 0.25±0.1mm.

Contact resistance: 100mΩ Max.(initial)

Operating force: 130±50g.

Minimum load: 10mA 3.3V DC.(reference only)

Life: 100,000 Cycles.

Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note: Unwashable, don't be immersed by epoxy and organic solvent.

RoHS compliant

06XXHIM-XXXG-G

MODEL NO.	L
43	4.3
50	5.0

OPERATING FORCE
100, 130, 160, 250



EV2.1	△		
EV2.0	無	新繪製	2012.09.06
版本 VER.	符號 SYMBOL	修改內容 ALTERATION	更新日期 DATE

產品 PRODUCT		Tact Switch		型號 MODEL NO.	0650HIM-130G-G
比例 SCALE	4 : 1	單位 UNIT	mm	一綺電子企業股份有限公司 總公司：110 台北市信義路四段415號13樓之3 13F-3 NO. 415, SEC. 4, HSIN YI ROAD, TAIPEI, TAIWAN TEL : 886-2-27290229(Rep.) FAX : 886-2-27582086 URL : http://www.switronic.com.tw E-MAIL : switches@ms36.hinet.net	
公差 TOLERANCE	±0.3mm				
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY			
Jay Kang	Alex Lin	Margaret Lee			

SWITRONIC®

INDUSTRIAL CORP.

Switches



ISO 9001:2008
CERT. No. 04 100 300111

SWITRONIC
INDUSTRIAL CORP.
Switches

