


Features

- ◆ Supplementary and reinforced insulation
- ◆ I/O isolation 4000 VACrms rated for 300 Vrms working voltage
- ◆ 2 x MOOP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- ◆ Industrial safety to UL/IEC/EN 60950-1
- ◆ Ultracompact SMD-package
- ◆ Operating temp. range -25°C to $+80^{\circ}\text{C}$
- ◆ Qualified for leadfree reflow solder process
- ◆ Available in tape & reel package
- ◆ 3-year product warranty

CB
Scheme
IEC 60950-1
IEC 60601-1

UL[®] US
UL 60950-1
ES 60601-1

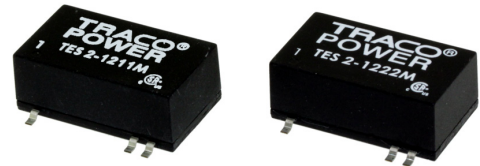

The TES 2M series is range of compact 2W DC/DC-converters providing a high I/O-isolation voltage of 4000 VAC. With a reinforced I/O-isolation system this product is an economical solution for many applications in instrumentation, industrial controls, medical equipment and everywhere where supplementary- or reinforced insulation is required.

These converters are qualified for high solder temperature profiles in leadfree solder processes. For automated SMD production lines the devices can be supplied in tape & reel package. Full SMD-design with exclusive use of ceramic capacitors ensure a very high reliability and a long product lifetime.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TES 2-0511M	5.0 VDC $\pm 10\%$ (nominal 0.5 VDC)	5 VDC	400 mA	66 %
TES 2-0512M		12 VDC	165 mA	66 %
TES 2-0513M		15 VDC	133 mA	66 %
TES 2-0522M		± 12 VDC	± 83 mA	72 %
TES 2-0523M		± 15 VDC	± 66 mA	73 %
TES 2-1211M	12.0 VDC $\pm 10\%$ (nominal 1.2 VDC)	5 VDC	400 mA	66 %
TES 2-1212M		12 VDC	165 mA	66 %
TES 2-1213M		15 VDC	133 mA	66 %
TES 2-1222M		± 12 VDC	± 83 mA	74 %
TES 2-1223M		± 15 VDC	± 66 mA	75 %
TES 2-2411M	24 VDC $\pm 10\%$ (nominal 2.4 VDC)	5 VDC	400 mA	66 %
TES 2-2412M		12 VDC	165 mA	66 %
TES 2-2413M		15 VDC	133 mA	66 %
TES 2-2422M		± 12 VDC	± 83 mA	74 %
TES 2-2423M		± 15 VDC	± 66 mA	75 %

Input Specifications

Input current no load	5 Vin models: 60 mA typ. 12 Vin models: 30 mA typ. 24 Vin models: 15 mA typ.
Reverse voltage protection	0.3 A max.
Recommended input fuse (slow blow)	5 Vin models: 1.0 A 12 Vin models: 0.5 A 24 Vin models: 0.2 A
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 18 V max. 24 Vin models: 30 V max.
Input filter	internal capacitors

Output Specifications

Voltage set accuracy	±4 %
Voltage balance (dual output models)	1 % max.
Regulation	– Input variation 1.2 % / 1 % change of Vin – Load variation 20 – 100 % 10 % max. 12 % max. for 5 Vout models.
Ripple and noise (0–20 MHz Bandwidth)	150 mVp-p max.
Temperature coefficient	±0.02 %/K
Short circuit protection	0.5 sec. max. (automatic recovery)
Minimum load	2 % of rated max current.
Capacitive load	single output models: 330 µF max. dual output models: 100 µF max. (each output)

General Specifications

Temperature ranges	– Operating –25°C to +80°C – Storage –55°C to +125°C – Case temperature +90°C max.
Derating	2.5 %/K above 60°C
Humidity (non condensing)	95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)	>2.0 Mio h
Isolation voltage (50Hz, 60sec.) – Input/Output	4000 VACrms (reinforced)
Isolation test voltage (1 sec.)	6000 Vpk
Leakage current (at 240VAC, 60Hz)	2 µA max.
Isolation capacitance – Input/Output	20 pF max. (at 100KHz, 1V)
Isolation resistance – Input/Output	>10 Gohm (at 500VDC)
Safety standards	IEC/EN 60950-1, IEC/EN 60601-1 3rd Edition, ANSI/AAMI ES60601-1 and CAN/CSA-C22.2 No. 60601-1, Medical Electrical Equipment - Part 1: General Requirements for Basic Safety and Essential Performance
Safety approvals	– UL online certification to UL 60950-1 (entry pending) www.ul.com/database File: e188913 - QQQQ2 – UL online certification to ES 60601-1 www.ul.com/database File: e188913 - QQHM2 – Certification documents www.tracopower.com/overview/tes2m
Switching frequency	50 – 100 kHz (PFM)
Environmental compliance	– Reach www.tracopower.com/overview/tes2m – RoHS directive 2011/65/EU


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Casing material	plastic
Pin material	phosphor bronze
Weight	3.8 g (0.13oz)
Lead-free reflow solder process	as per J-STD-020D.01 (to find at: www.jedec.org - free registration required)
Moisture sensitivity level (MSL)	level 2 as per J-STD-033B.01 (to find at: www.jedec.org - free registration required)
Packaging	www.tracopower.com/products/tes2m-pack.pdf


Application note: www.tracopower.com/products/tes2m-application.pdf

Outline Dimensions

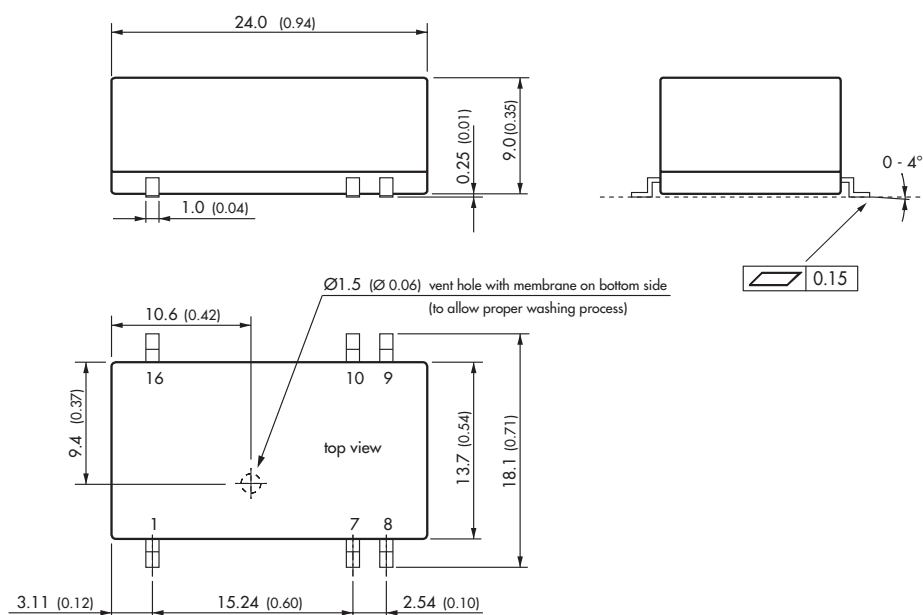

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
7	No con.	No con.
8	No con.	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

Solder Pad Dimension

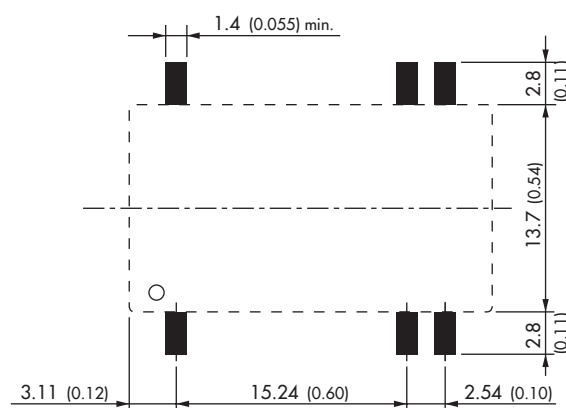

Dimensions in [mm], () = Inch
Tolerances ± 0.25 (± 0.01)
Pin pitch tolerances ± 0.05 (± 0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TRACO Power:

[TES 2-0511M](#) [TES 2-2411M](#) [TES 2-1211M](#) [TES 2-2412M](#) [TES 2-2413M](#) [TES 2-1223M](#) [TES 2-2423M](#) [TES 2-1222M](#) [TES 2-1212M](#) [TES 2-0523M](#) [TES 2-1213M](#) [TES 2-2422M](#) [TES 2-0513M](#) [TES 2-0522M](#) [TES 2-0512M](#)